


# SEM8-C Dialog 1-4

## Replacement 8,4 Deckel / Grundig

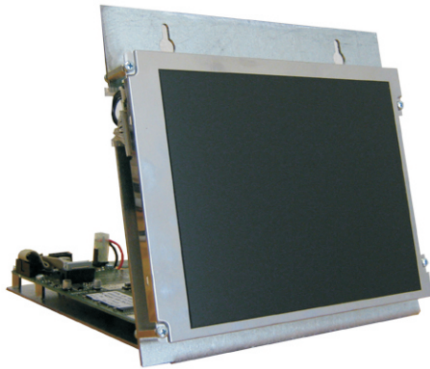

### Overview

- 8,4 " TFT / LCD Monitor for Deckel Dialog1, Dialog2, Dialog3, Dialog4 and Contour
- Replacement for 9" CRT-monitor monochrome
- Connector and signal timing compatible to the control
- Settings via on-screen-menu
- Chassi monitor with compatible mounting points

### Description

The monitors SEM8-C are used as replacement for 9" CRT-monitors monochrome in control Dialog-1, Dialog-2, Dialog-3, Dialog-4 and Grundig Contour from Deckel. The default timing is compatible to the control, this means after connecting the monitor, the visualisation works correctly. Further adjustments can be made via on-screen-menu. Connector and interface for graphic-signal are compatible to the control. Attachment points of the TFT-monitor match the points as the original monitor. Mechanical adjustments or modifications are not needed.

### Technical data

#### **Overview:**

Industry TFT monitor 8,4" for Deckel

#### **Control:**

Dialog1, Dialog2, Dialog3, Dialog4 und Grundig Contour

#### **Original monitor:**

9" CRT-monitor monochrome

#### **Interfaces:**

pin connector 20-pin flat cable

#### **Synchronisation / Timings:**

compatible to the control

#### **Resolution:**

max. 800x600

#### **Visible picture:**

154 x116mm

#### **Adjustments:**

via on-screen-menu

#### **Brightness / Contrast:**

min. 400 cd/qm, 500:1

#### **Power supply:**

15VDC via signal line

#### **MTBF:**

LED min. 50000h

#### **Mechanical dimension:**

compatible

#### **Environmental conditions:**

Operating temperature 0-50°C

Storage temperature 0-65°C

Humidity: 10 - 80 % rel. humidity, not condensing

#### **Protective class:**

Front IP 65

#### **Norms:**

EN55022 EN55024 EN61010-1

### Part number

10030901 SEM8-C-Deckel-Dialog1-4